


iSTA-B101S Series

Stainless Steel Bullet Camera



SMART FACTORY

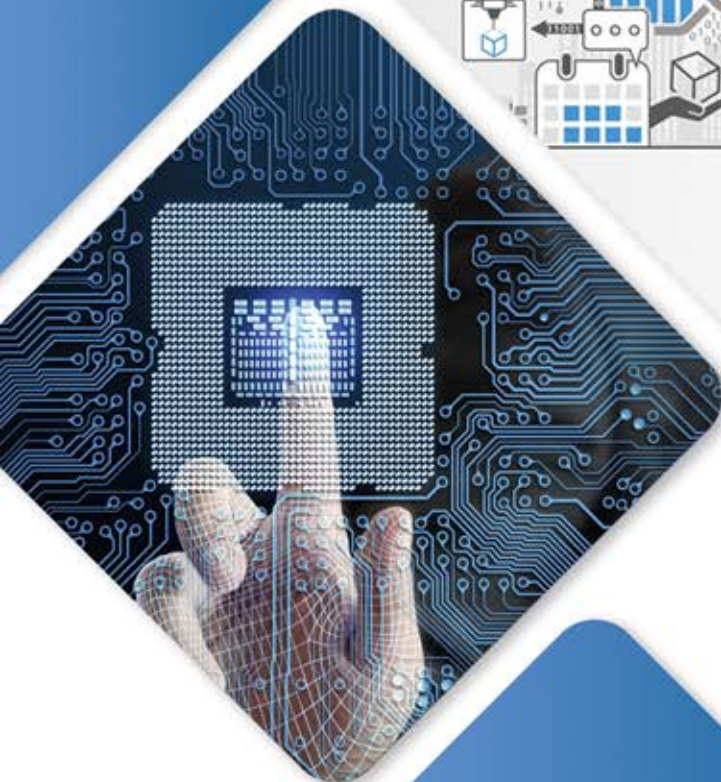

Key Features & Detail

- 1/2.8" Sony STARVIS CMOS
- 2 Megapixel Full HD(1920 x 1080)/30fps
- AISI 316L Stainless steel
- IP68 방진방수 등급 (수심 40M)
- 충격대응 IK10
- 2pcs Super IR LED(20~30M)
- HD-SDI / EX-SDI / AHD / TVI / CVI / CVBS 2개 영상 선택 출력
- 2.7 ~ 12 mm 렌즈
- True D/N (Auto/Day/Night)
- 선박 / 해양 환경 등을 위한 내부식성 특성
- 병원 / 약국 / 식자재 위생환경 등을 위한 항바이러스 / 항박테리아 특성
- 화학공장 / 유해화학물질 취급환경을 위한 내화학성 특성



주요 응용분야 - Application



오트/선박/어선



해안가/항만



반도체/2차전지



유해화학물질 환경



석유/화학/가스 시설



병원/약국



식품/위생환경




발전소/수자원공사/하수처리장

CAMERA SPECIFICATION

모델	iSTA-B101S
활상소자	1/2.8" Sony STARVIS CMOS
화소수	1945(H) x 1109(V) = 2.16 Megapixel
Scanning System	16 : 9 Progressive Scan
해상도	Digital : 1920 x 1080p, More than 1000 TVL(1080p)
화각	33 ~ 100°(H)
렌즈	2.7 ~ 12 mm
최저조도	More than 0.03 lux(DSS off) / Max Gain 63dB
Infra-Red	20 ~ 30 m Distance
S/N Ratio	More than 52dB(AGC off)
셔터	Auto / Flicker / Manual(1/30(25) ~ 1/30,000
Sens-Up	Off / x2 / x4 / x8 / x16 / x32
게인이득(AGC)	0 ~ 10
Day & Night	Auto / Color / R&B / Ext.
AWB	Auto / Preset / Manual
DNR	Off / Low / Middle / High
기타기능	DEFOG / MIRROR / FLIP / D-WDR / SHADING PRIVACY(16points) / MOTION
영상출력	HD-SDI / EX-SDI 1.0 / EX-SDI 2.0 : 1 영상출력 선택가능 AHD / TVI / CVI / CVBS : 1 영상출력 선택가능
프레임 레이트	1080p – 25fps/30fps
언어	ENG / JPN / KOR / CHN
전원	DC12V
방진방수 등급	IP68 (수심 40M)
충격대응	IK10
재질	AISI 316L Stainless steel
동작 온도/습도	-25°C ~ +55°C / 95% RH 이하
사이즈	Ø106 x 217 mm
무게	2.5 Kg

DIMENSION

단위 : mm

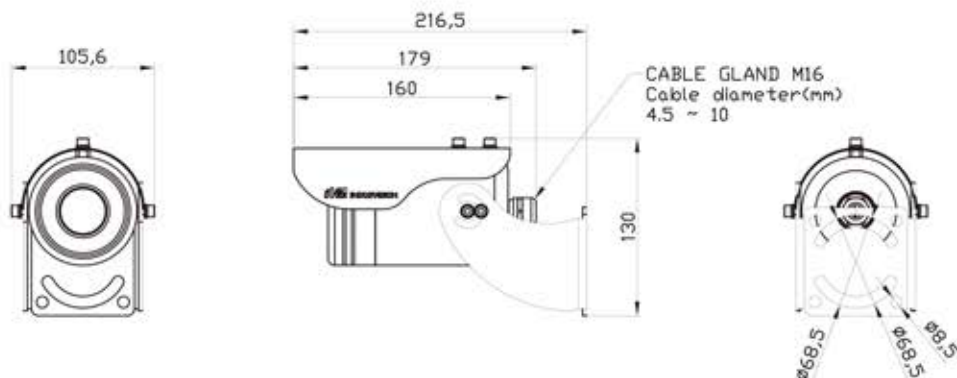

Passion, Challenge, Dream & Human Technology

INDUSVISION is Korea's first Specialized Industrial
Explosion-proof CCTV Solution Company
Value creation of industrial
explosion-proof solutions for better future and safety



iVEx (주)인더스비전
Advanced Technology for Better Future

경기도 부천시 오정구 석천로 397, 104동 709호(삼정동, 부천테크노파크쌍용3차)(우)14449

TEL 032-624-0750 | FAX 032-624-0747 | MAIL info@indusvision.co.kr